

Platform Attachment

The Platform Attachment is suitable for lifting and positioning loads such as Reels, Drums, Components, Boxes, Containers, Tooling, Assemblies, etc. Applications include work positioning on assembly lines and work areas.

Constructed from Stainless Steel the attachment is suitable for hygienic and clean room applications

Comprehensive Range

Available in a wide range of sizes as standard and backed up by a full bespoke design service ensures the right solution can be provided for most applications.

Fully Interchangeable

Packline's full range of attachments are fully interchangeable and can be easily fixed or removed from any model of Compac fitted with the unique quick release system.



This quick release system enables one Compac to be used with multiple attachments providing an economical solution to a range of applications.

CE Marked and Fully Tested

Every design is fully tested, CE marked, supported by a detailed technical file meeting the latest legislation and health & safety directives.




Specification for Platform Attachment

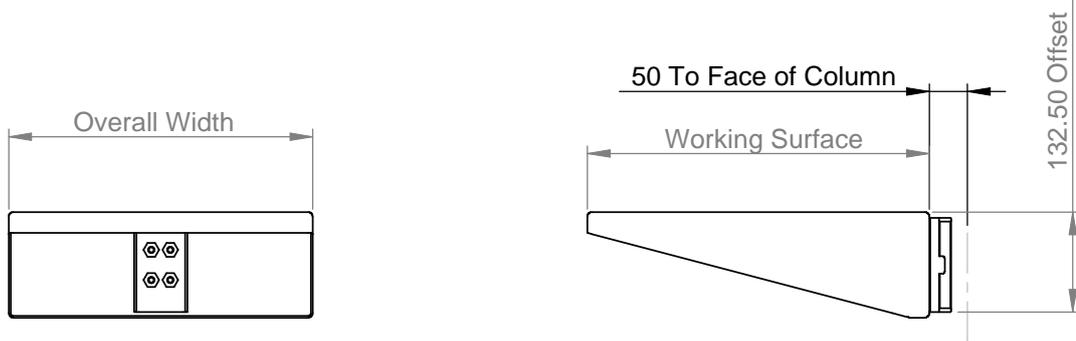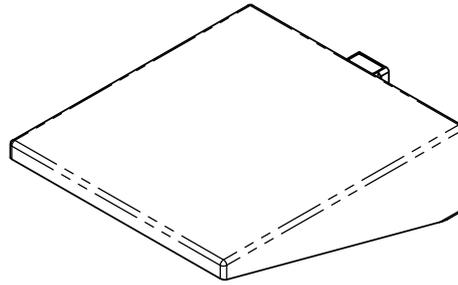

	Description	Max. SWL	Load Centre	Max. SWL on Compac Model;			Attachment
				C60	C150	C300	Mass
PL2066-1	450/400	50kg	400mm	50kg	50kg	50kg	8kg
PL5555-1	550/700 - with lip	85kg	400mm	40kg	85kg	85kg	15kg

Platform Attachment on a standard 2000H Compac - offset = 132.5mm (LOC001)

	Min. Lift Height		Max. Lift Height	
	C60/C150	C300	C60/150	C300
50C	303.5mm	367.5mm	1790.5mm	1773.5mm
100C	354.5mm	418.5mm	1841.5mm	1824.5mm
85P	298.5mm	362.5mm	1785.5mm	1768.5mm
85R	298.5mm	362.5mm	1785.5mm	1768.5mm

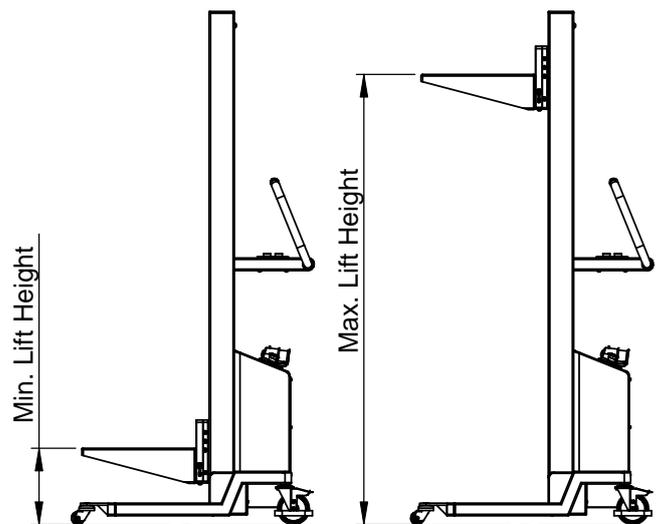

50C=50 dia swivel castors 100C=100 dia swivel castors 85P=85 dia pallet wheels 85R=85 dia Rocking Pallet Wheels